

SPRINTER

PP Series

6.6m UV Hybrid Printer (21.65 ft)

Power Pro6600

Printing, nothing is impossible



Max.Print speed 401m²/h (4316ft²/h)

Comparison speed : Printing PVC flex banner

234 m²/h (1367ft²/h)

479×1080 dpi 3 pass

119 m²/h (1280ft²/h)

479×1440 dpi 6 pass

*speed and quality based on SPRINTER inks



Multi-Color options

Customizable Color Combinations

Over 10 options, including C-W, W-C, C-W-C,

Embossed textures



Enhanced operability and functions

New feeding up system

Special belt conveyor

Four-roll printing four times productivity



Power Pro6600

6.6m UV Hybrid Printer (21.65 ft)

Power Pro6600


SPRINTER

Model	Power Pro6600
Printhead	Konica1024a 4rows / 6rows
Resolution	479,1080,1440,2160 dpi
Color	CMYK, White/Varnish, Lc, Lm (Option)
Material thickness	0~25mm (0.984in)
Ink curing system	UV LED curing system
Vacuum suction	8 zones
Max printing width	6600mm (21.6535ft)
Ink	UV curable ink
Color validity	3~5 years outdoor and 7~10 years indoor without color fading (use Sprinter ink)
Ink capacity	2.5L ink tank, automatic alarm for ink volum shortage
Ink supply system	Auto Negative ink supply
Media	Paper, Leather, Wallpaper, Soft film, PVC, PP, PE...
PC specification	Win 7/10/11 64bit . RAM≥8G . HDD≥500G . SSD≥128G . CPU≥Inte I5
Media handling	Belt conveyor
Transmission system	X-axis high-precision magnetic motor
RIP software	PhotoPrint /PrintFactory/Caldera(option)
Operation environment	Temperature / 18°C~ 26°C
	Humidity / 40% ~ 70%
Power supply	Power maximum:14.5KW; AC,50HZ/60HZ; 380v(±10%) > 15A
Image format	Tiff,JPEG,EPS,PDF
Dimensions(LxWxH)	9500 x 2300 x 1920 mm (31.168 x 7.5459 x 6.3ft)
Weight	8000kg(17637lb)
Certification	CE

* Notice: above specifications are subject to change without prior notice.

all the above dimensions shall be subject to the metric system, with the imperial system for reference only.

Printhead soleplate

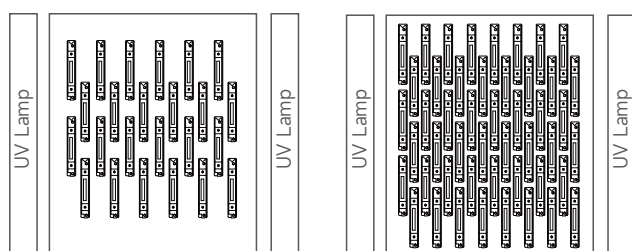

4 rows

6 rows

4 rows and 6 rows for KM1024a or KM1024i(option:Rioch G5/G6)

Four-roll printing Four times productivity

Taking full advantage of the 6600mm(21.65 ft) printing width, 4 media rolls (1.27m/50inch for each roll) can be mounted for simultaneous printing. Different (or same) print jobs can be printed on the 4 separate rolls. Users can select a preferred width separately for each roll. Power Pro6600 helps to shorten delivery time and reduce workload.




* The option "4 feed-up kits" is required.

Print speed

Standard 2	479*2160 6Pass	104m ² /h (1119ft ² /h)
Standard 1	479*1440 6Pass	119m ² /h (1280ft ² /h)
High Speed 2	479*1440 4Pass	183m ² /h (1969ft ² /h)
High Speed 1	479*1080 3Pass	234m ² /h (2518ft ² /h)
Draft	479*1080 2Pass	401m ² /h (4316ft ² /h)

0 100 200 300 400 500
6 rows CMYK

Dimension

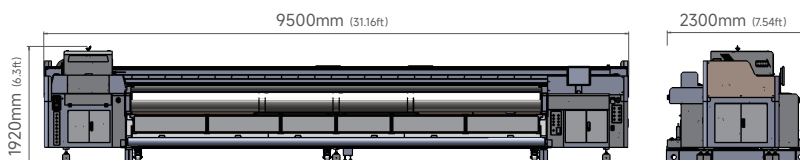

Shanghai Huidi Digital Technology Co., Ltd

E-mail: info@huiditech.com TEL: (+86 21) 58226625 Fax: (+86 21) 58226627

Add: No.59, Hangfan Road, Hangtoun Town, Pudong District, Shanghai, China

Website: www.huiditech.com



More details



Contact us

